




**Akumulátorové redukcie HRS**

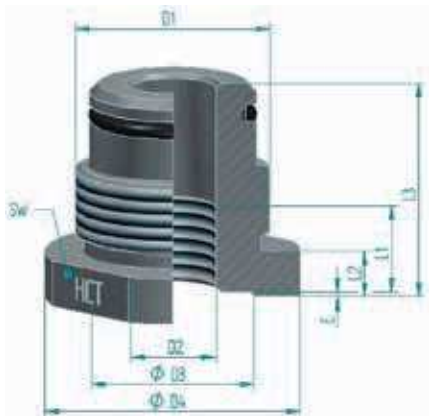

**Technické data**

**Pracovný pretlak:**

350 bar

**Materiály:**

konštrukčná oceľ; FKM  
iné prevedenie na vyžiadanie

**Teplotný rozsah:**

-20 °C až 80 °C

Typ	D1	D2	L1	L2	L3	SW	E	Ø D2	Ø D3
HRS-440	G 3/4"	bez vrtania		8	36	32			36,5
HRS-441		IG 1/4"	12	8	36	32	1	25	36,5
HRS-442		IG 3/8"	12	8	36	32	1	28	36,5
HRS-443		IG 1/2"	16	29,5	57	36	1	34	42
HRS-460	G 1 1/4"	bez vrtania		10	47	50			
HRS-462		IG 3/8"	13	10	47	50	1	28	55
HRS-463		IG 1/2"	15	10	47	50	1	34	55
HRS-464		IG 3/4"	16	10	47	50	1	42	55
HRS-480	G 2"	bez vrtania		12		50			75
HRS-482		IG 3/8"	12	12	56	65	1	28	75
HRS-483		IG 1/2"	15	12	56	65	1	34	75
HRS-484		IG 3/4"	17	12	56	65	1	42	75
HRS-485		IG 1"	20	12	56	65	1	47	75
HRS-486		IG 1 1/4"	21	12	56	65	1	58	75
HRS-487		IG 1 1/2"	29	36	80	70	1	62	80
HRS-48B		G 2"	M40 x 1,5	27	40	77	80		

Výrobné tolerancie nejsou zohľadnené. Zmeny vyhradené.



**Adaptér HFS s pripojením AG 2" a SAE výstupom**

Špeciálne prevedenie sú možné na základe dopytu zákazníka.