



Pivoting version

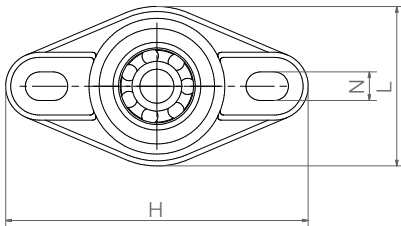

igumid G housing,
PA cage,
stainless steel balls or
glass balls

- Trouble-free readjustment thanks to elongated holes
- Precise alignment of the bearings not necessary

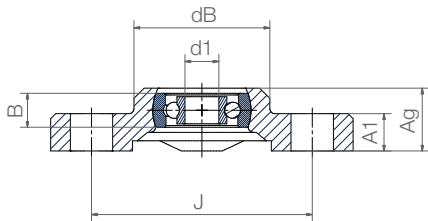

Order key

Type	Material
------	----------

EFOM-BB1-P 08-B180-ES

2-hole fixed flange ball bearings	Ball bearing, single row	Pivoting version	Inner Ø	Race material	Ball material
-----------------------------------	--------------------------	------------------	---------	---------------	---------------

Race material

B180 = xirodur® B180

Options:

Ball material

ES = Stainless steel

GL = Glass

Technical data

Type	Radial load capacity		Max. speed [rpm]	Weight	
	stat. [N]	dyn. [N]		B180/ES [g]	B180/GL [g]
EFOM-P08	80	94	2,200	19.5	18.1
EFOM-P10	110	130	1,900	36.3	33.6
EFOM-P12	130	147	1,750	61.7	59.4

Dimensions [mm]

Inner Ø d1	dB d2	H	L	J	A1	Ag	B	N	Max. pivot angle	Part No.
8	32.5	72.6	38	53	10	15.5	8	6.4x10.1	±20°	EFOM-BB1-P08-B180- <input type="checkbox"/>
10	40.0	89.0	47	65	11	18.8	10	8.4x12.5	±20°	EFOM-BB1-P10-B180- <input type="checkbox"/>
12	48.5	101.0	58.5	75	14	23.5	12	8.4x12.5	±20°	EFOM-BB1-P12-B180- <input type="checkbox"/>



Order example:

EFOM-BB1-P08-B180-ES = 2-hole fixed flange ball bearing with race material xirodur® B180 and stainless steel balls



Available
from stock