

iglidur® tribo-tape | Product range

For use in visible areas – iglidur® B160



Order key

Type	Dimensions [mm]	Options
B160 - T - 005 - 0020 - G		
iglidur® material	Tape	Thickness
		Width
		Adhesive back

G = Optional self-adhesive back

Especially where the iglidur® tribo-tape is a visible part, the new black option now offers even more creative freedom. In addition the wear resistance has been improved once again compared to iglidur® A160.



tribo-tape from iglidur® B160 with adhesive back
Temperature -40°C up to $+90^{\circ}\text{C}$

Dimensions [mm]

Material thickness without adhesive back ± 0.1	Material thickness with adhesive back ± 0.121	Width ± 1.0	Part No. without adhesive back	Part No. with adhesive back
0.5	0.71	20	B160-T-005-0020	B160-T-005-0020-G
0.5	0.71	50	B160-T-005-0050	B160-T-005-0050-G
0.5	0.71	100	B160-T-005-0100	B160-T-005-0100-G
0.5	0.71	500	B160-T-005-0500	B160-T-005-0500-G
1.0	1.21	500	B160-T-010-0500	B160-T-010-0500-G



Individual widths upon request


Continuously from 10–500mm



Cutting service


Design tribo-tape flexibly

► www.igus.sk/tape-cut-to-size

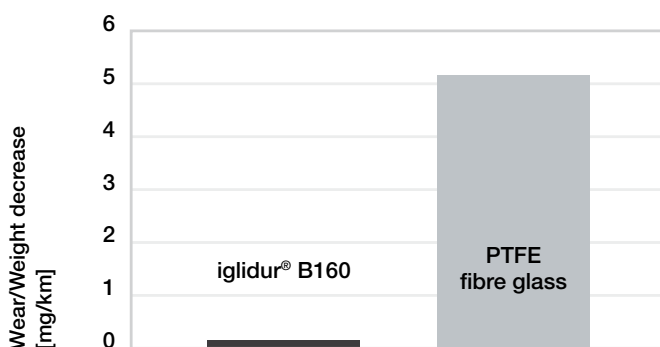

Linear wear against stainless steel pin (AISI 303)

F = 10N, v = 9,600mm/min

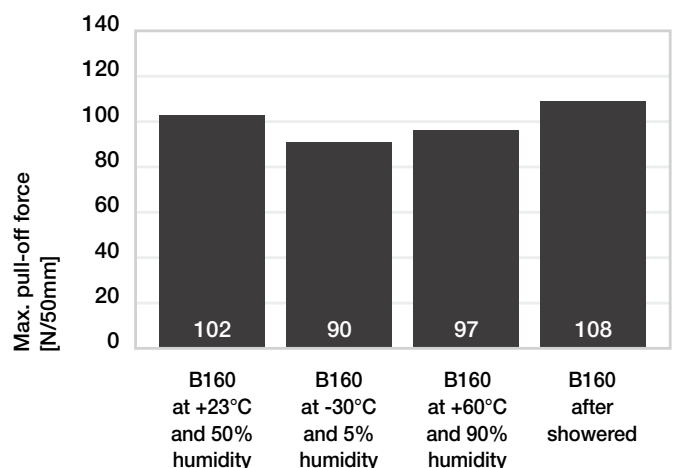

180° pull-off test after various exposure conditions