



Order key

Type	Dimensions [mm]	Options
W160 - T - 005 - 0020 - G		
iglidur® material	Tape	Thickness
		Width
		Adhesive back

G =
Optional
self-adhesive
back

With its white colour and UV-stabilised additives, iglidur® W160 tribo-tape offers even more design freedom. 148)



tribo-tape from iglidur® W160 with adhesive back
Temperature -40°C up to $+90^{\circ}\text{C}$


Dimensions [mm]

Material thickness without adhesive back	Material thickness with adhesive back	Width ± 1.0	Part No. without adhesive back	Part No. with adhesive back
± 0.1	± 0.121			
0.5	0.71	20	W160-T-005-0020	W160-T-005-0020-G
0.5	0.71	50	W160-T-005-0050	W160-T-005-0050-G
0.5	0.71	100	W160-T-005-0100	W160-T-005-0100-G
0.5	0.71	500	W160-T-005-0500	W160-T-005-0500-G
1.0	1.21	500	W160-T-010-0500	W160-T-010-0500-G



Individual widths upon request

Continuously from 10–500mm

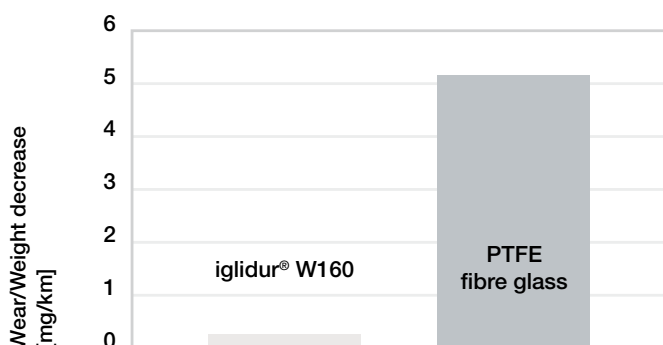

Linear wear against stainless steel pin (AISI 303)

$F = 10\text{N}$, $v = 9600\text{mm/min}$


148) The original antibacterial version of the iglidur® W160 material is no longer available due to a change in the Biocides Regulation. A new antibacterial version is being developed.



Cutting service

Design tribo-tape flexibly

► www.igus.sk/tape-cut-to-size

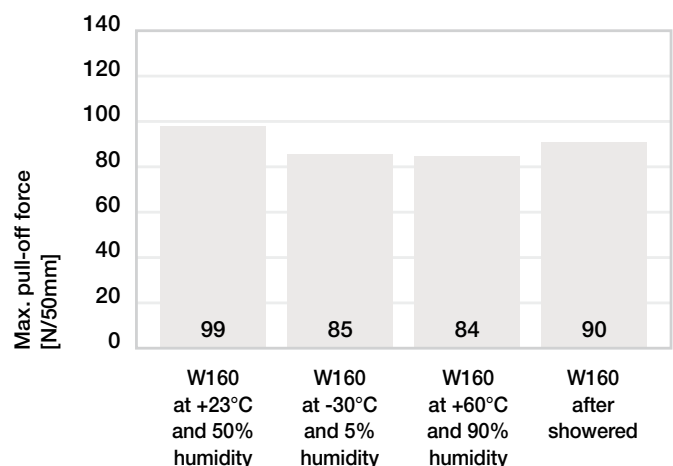

180° pull-off test after various exposure conditions