

For extreme ambient conditions – iglidur® C500




Order key for round bars

Type Dimensions [mm]

SF R C500-30 00 - □

In your required length, freely selectable between 50 and 1,000mm. Cut-to-size parts are delivered oversized.

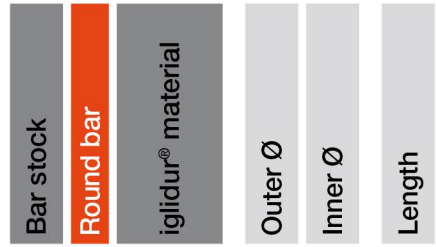

Dimensions [mm]

Ø	Lengths	Part No.
10	50–1,000	SFRC500-1000-□
15	50–1,000	SFRC500-1500-□
20	50–1,000	SFRC500-2000-□
25	50–1,000	SFRC500-2500-□
30	50–1,000	SFRC500-3000-□
35	50–1,000	SFRC500-3500-□
40	50–1,000	SFRC500-4000-□
45	50–1,000	SFRC500-4500-□

Ø	Lengths	Part No.
50	50–1,000	SFRC500-5000-□
55	50–1,000	SFRC500-5500-□
60	50–1,000	SFRC500-6000-□
65	50–1,000	SFRC500-6500-□
70	50–1,000	SFRC500-7000-□
80	50–1,000	SFRC500-8000-□
90	50–1,000	SFRC500-9000-□
100	50–1,000	SFRC500-10000-□