

For the rail industry, flame-retardant, complies with DIN EN 45545 HL3, R22/R23 – iglidur® RW370




Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R RW370-30 00-□

In your required length, freely selectable between 50 and 1,000mm. Cut-to-size parts are delivered oversized.

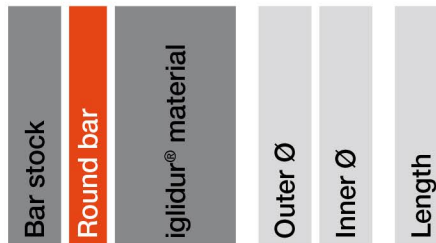

Dimensions [mm]

Ø	Lengths	Part No.
10	50–1,000	SFRRW370-1000-□
15	50–1,000	SFRRW370-1500-□
20	50–1,000	SFRRW370-2000-□
25	50–1,000	SFRRW370-2500-□
30	50–1,000	SFRRW370-3000-□
35	50–1,000	SFRRW370-3500-□
40	50–1,000	SFRRW370-4000-□
45	50–1,000	SFRRW370-4500-□

Ø	Lengths	Part No.
50	50–1,000	SFRRW370-5000-□
55	50–1,000	SFRRW370-5500-□
60	50–1,000	SFRRW370-6000-□
65	50–1,000	SFRRW370-6500-□
70	50–1,000	SFRRW370-7000-□
80	50–1,000	SFRRW370-8000-□
90	50–1,000	SFRRW370-9000-□
100	50–1,000	SFRRW370-10000-□