



# Multi-channel flat fan nozzles for air Whisperblast®, Plastic versions Series 600.130/600.484

Particularly  
silent!

**Highly efficient air stream,  
acting upon areas.  
Reduced noise levels.  
Low air consumption.**

**Applications:**


Blowing off and blowing out,  
cleaning, drying, cooling,  
conveying with air.




\* Complies with  
OSHA require-  
ments on noise  
level




600.130 (POM or PP)




Weight: 23 g · T<sub>max</sub> POM: 50 °C  
Weight: 15 g · T<sub>max</sub> PP: 60 °C



600.484.56 (POM)




Weight: 16 g · T<sub>max</sub>: 50 °C



Item 600.130.56.01 does not  
meet FDA/(EC) No. 1935/2004  
requirements.

**Technical Data**

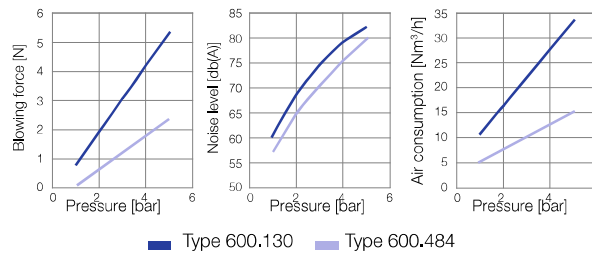

**Socket**  
Ordering no.  
095.016.30.14.23.0

Material: Brass

For connection of series  
600.130 with compressed air  
guns.



Ball joints see page 9.8

Type	Ordering no.					
	Mat. no.		Code			
	S2	56				Quick connection
	PP	POM	1/4 BSPP	1/4 NPT	M12 x 1.25	NW 5
600.130	○	○	AC	BC	-	-
600.130 with plug	-	○	02	-	-	-
600.130 with plug, Hose barb (D = 8 mm) and Extension tube, steel (L = 85 mm)	-	○	01	-	-	-
600.484	-	○	AC	BC	HG	00

Example of ordering: Type 600.130. + Mat. no. 56. + Code AC = Ordering no. 600.130.56.AC

