




Multi-channel flat fan nozzles for air Whisperblast®, metallic versions Series 600.283/600.493/600.562

Particularly
silent!


Metallic versions for higher temperatures. Highly efficient air stream, acting upon areas. Reduced noise levels. Low air consumption.

Applications:


Blowing off and blowing out, cleaning, drying, cooling, conveying with air.



600.283.42 (Aluminum)



600.493.1Y (Stainless steel 316L SS)




600.562.1Y.10 (Stainless steel 316L SS)


Complies with OSHA requirements on noise level only

Complies with OSHA requirements


Complies with OSHA requirements

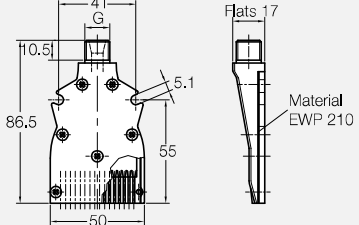

Weight: 60 g · T_{max}: 200 °C



Weight: 126 g · T_{max}: 550 °C




Weight: 17 g · T_{max}: 550 °C



Socket
Ordering no.
095.016.30.14.23.0


Material: Brass

For connection with compressed air guns for the following series:
– 600.283
– 600.493

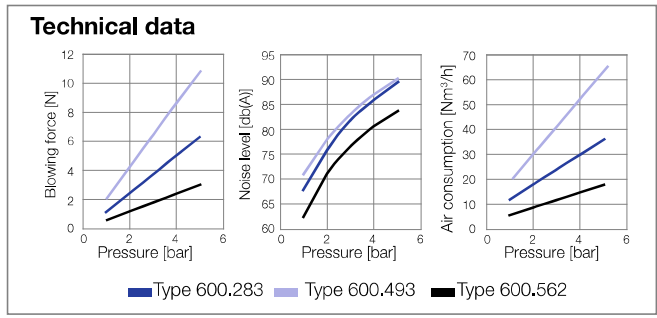

Ball joints see page 9.8

For more information please ask for our special brochure »Nozzles and Accessories for Compressed Air«.



Type	Ordering no.				
	Mat. no.		Code		
	42	1Y			
	Aluminum	Stainless steel	1/8 BSPP	1/4 BSPP	1/4 NPT
600.283	○	-	-	AC	BC
600.493	-	○	-	AC	BC
600.562.1Y.10	-	○	○	-	-

Example of ordering: Type 600.283, + Mat. no. 42, + Code AC = Ordering no. 600.283.42.AC