


**APPROVED IN ACCORDANCE WITH THE EUROPEAN
STANDARD 2014/34/EU - ATEX**

These instruments, intrinsically safe certified:

CESI 03 ATEX 265 Ext.2 II 1G Exia IIC T4/T5/T6 Ga,
CESI 03 ATEX 265 Ext.2 II 1/2G Exia IIC T4/T5/T6 Ga/Gb,
are used to control the level of liquids or fuel in tanks, both
underground and outdoors, installed in hazardous areas where
flammable products are treated.

GENERAL CHARACTERISTICS

- **Stainless steel – AISI 316**
- Up to 6 switch points.
- Up to 6 m length.
- Maximum working pressure 50 bar depending on used float.
- Standard working temperature up to 100°C.
- Executions up to 160°C on request.
- Operating ambient temperature
-40/+40°C = T6, -40/+55°C = T5, -40/+80°C = T4
- Minimum degree of protection IP65.

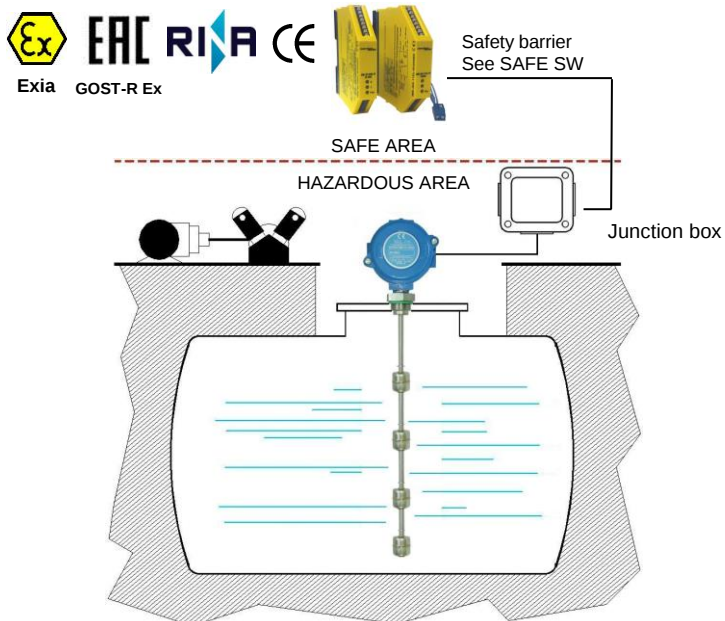

FLOATS

Tab.1



Material	Stainless steel – AISI 316									
Specific gravity	0,75		0,55		0,65		0,7		0,6	
Contact type	3	7D	3	7D	4	7	4	7	7	
Max N. of contacts	6	4	6	4	6		6		6	
Max. bar	30		10		10		50		15	
Max. °C - Class	L = 100°C									
On request	N = 130°C / R = 160°C									

ELECTRICAL CONTACTS


Tab.2

TYPE		POWER		VOLTAGE		CURRENT	
		VA	W	AC	DC	AC	DC
SPST	3	70	50	300	350	0,5	0,7
SPST	4	80	80	250	250	1.3	1,3
SPDT	7	60	60	230	230	1	1
SPDT	7D	20	20	150	150	0.5	0.5

ELECTRICAL OUTPUT

Tab.3

I1 IP65 housing (2G)	I2 IP65 housing (2G)	I3 IP66/67 housing (1G)	IS1 DIN43650 plug IP65 (1G)	IC1 - IC2 Cable IP65 (1G)			IP1 - IP2 Cable-gland (1G)
5 terminals	18 terminals	18 terminals	DIN43650 29x29	IC1 IC2	Cable Cable	L = 1,5m L = 3.0m	IP1 Brass IP2 Polyamide IP67

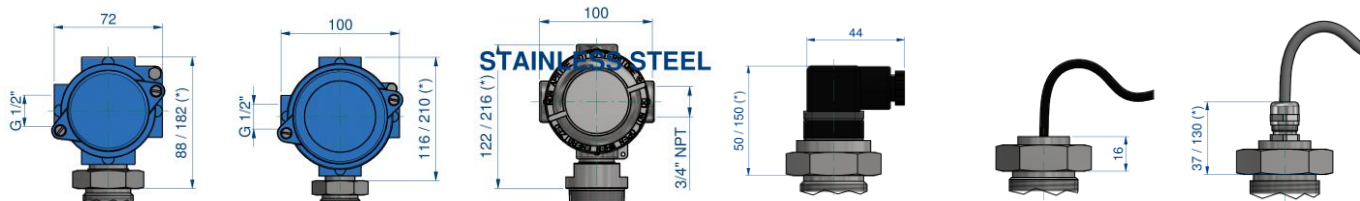

With heatsink - see dimension (*)

Temperature class $N - R = T6 - T5$

Temperature class **N = T4** heatsink not needed

PROCESS CONNECTIONS

Tab.4

Installation from inside IC– IP output				Float type	Installation from outside – available thread and flanges						
06 1/8"	08 1/4"	10 3/8"	15 1/2"		25 1"	32 1 1/4"	40 1 1/2"	50 2"	FSHX Flange	FSPX Flange	DN Flange
All type of floats All type of thread				S29	G	G-C-N	-	-	•	•	•
				S32	G	G-C-N	-	-	•	•	•
				S41	-	-	G-C-N	G-C-N	-	-	•
				S52	-	-	-	G-C-N	-	-	•
				S100	-	-	-	-	-	-	•

Male thread




G	C	N
Parallel UNI 228/1	Conical UNI 7/1	Conical NPT

Available materials

S	T
AISI-316	AISI-304 On request

DN - Available materials

C	S
Steel	AISI-316

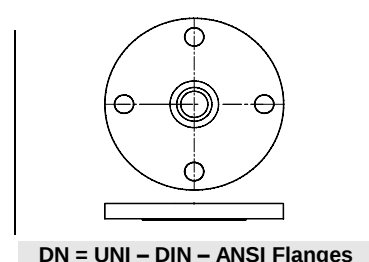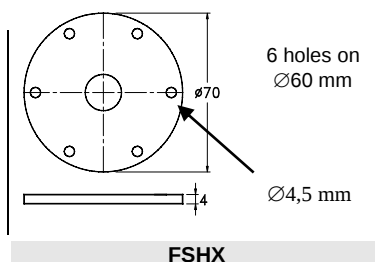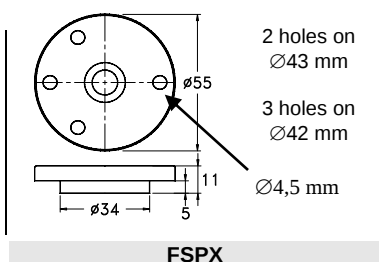

SAFETY BARRIERS

All Exia level controls must be electrically connected to the active or passive barriers according to the European Standard EN 50020. See technical bulletin SAFE SW.

A Flanged connection
A1 Threaded connection

WIRING

Tab.5

I	Independent	Separately wired contacts	1	NO	Contacts status in no level conditions
C	Common	Common wired contacts	2	NC	
S	Custom	Contacts wired on request	3	SPDT (*)	


(*) Connected to barrier input just as NO or NC

SWITCH POINTS - minimum value in mm.

Tab.6

The switch points L1 ÷ L6 are measured from the stop of the fitting or flange connection.
General tolerances on switch points ± 3 mm.

		Minimum distance in mm.									
		S29		S32		S41		S52		S100	
A		20		20		30		35		60	
A1		40		40		50		55		-	
B		25		25		35		40		70	
C		45		45		65		75		125	
Contact type		3	7D	3	7D	4	7	4	7	7	
Max. N. contacts		6	4	6	4	6		6		6	

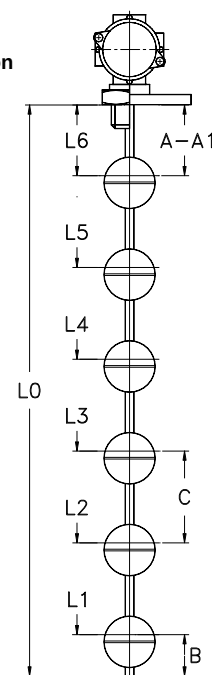

NOMENCLATURE

M2	S52	4	1300	S	50	G	S	I1	L	I22	L1÷L6
•											
	•										
		•									
			•								
				•							
					•						
						•					
							•				
								•			
									•		
										•	
											•

	Number of contacts S1 / M2÷M6
Tab.1	Float
Tab.2	Electrical contact
-	Total length = L0 in mm. (See drawing)
-	Rod material
Tab.4	Process connection dimension
Tab.4	Process connection thread
Tab.4	Process connection material
Tab.3	Electrical output
Tab.1	Temperature class
Tab.5	Wiring and contact status
Tab.6	Switch points (mm)

MULTIPOINT S - ATEX I

Request form

External mounting					Internal mounting
I1 I2 Electrical housing IP 65 W1 max. 5 terminals 70mm W2 max. 18 terminals 100mm	I3 Electrical housing IP 66/67 Stainless steel - AISI 316 Max. 18 terminals	IS1 IS2 Plug DIN 43650 29x29 or 15x15 Max 3 terminals	IP1 IP2 P1 Cable-gland IP68 P2 Cable-gland IP67 L cable.....mm	IC Cable L.....mm	IC Only internal mounting Cable L.....mm
Liquid under control: Specific gravity: Maximum pressure: Maximum temperature:			Approvals: Exia GOST-R Ex		
Process connection: ☐ Threaded: ☐ Flanged:					
Material: ☐ Brass ☐ AISI-316 ☐ PVC ☐ PP ☐ PVDF					
Wirings: ☐ Independent contacts NO or NC (Max. 6 contacts) ☐ Independent SPDT contacts (Max. 4 contacts) ☐ Common wired NO or NC (Max. 6 contacts) ☐ Common wired SPDT contacts (Max. 5 contacts)					
Total length L0 (mm) 					