

Product Information

NM1-004HK

Level Switch NM1-004HK




- Cover or base mounting for monitoring max. or min. level
- normally closed or normally open contact

Characteristics


Mechanical level monitor for fluid media, with contact-free triggering of a reed contact.

Technical data

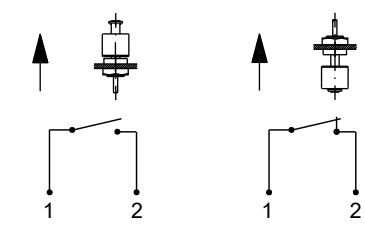Switch	reed switch
Process connection	male thread G 1/8 A
Density of medium	$\geq 0.75 \text{ g/cm}^3$
Pressure resistance	PN 30 bar
Medium temperature	-20...+105 °C
Ambient temperature	-30...+55 °C
Media	water, oils
Wiring	<p>'normally open' or 'normally closed' No. 0.442</p>  <p>the switching function can be modified by changing the float.</p>
Switching voltage	max. 150 V AC / DC
Switching current	max. 0.5 A
Switching capacity	max. 20 VA / W

Protection class	2 - safety insulation
Ingress protection	IP 65
Electrical connection	cabl 1.5 m
Materials medium-contact	1.4571
Non-medium-contact materials	PVC
Weight	0.06 kg
Installation location	vertical installation position

Dimensions

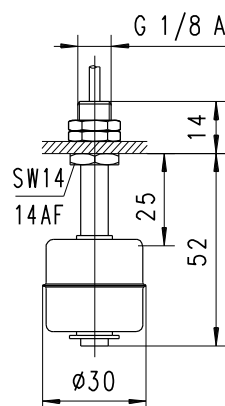

Details of float location 25 mm for density 1 g/cm^3 .
The device is delivered without a seal.

Handling and operation

- It must be ensured that the values given for voltage, current, and power are not exceeded.
- When switched on, a load must be connected in series.
- The electrical details apply to ohmic loads. Capacitive, inductive and lamp loads must be operated using a protective circuit.
- Not suitable for use in media with ferritic particles.

Ordering code

NM1 - 1. 004 2. H 3. K

1. Connection size	
004	threaded connection G 1/8 A
2. Process connection	
H	screw-in thread
3. Connection material	
K	stainless steel