





e-chains® | Series 04 | One-piece, non-openable


Part No. e-chains®	Bi [mm]	Ba [mm]	R Available bend radii [mm]	Weight [kg/m]
04.07.R.0	7	12	015 018 028 038 048	≈ 0.07
04.10.R.0	10	15	015 018 028 038 048	≈ 0.08
04.16.R.0	16	21	015 018 028 038 048	≈ 0.09
04.20.R.0	20	25	015 018 028 038 048	≈ 0.10
04.30.R.0	30	35	015 018 028 038 048	≈ 0.11

Complete Part No. with required radius (R). Example: 04.10.028.0

Installation dimensions

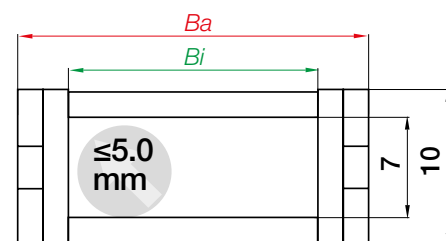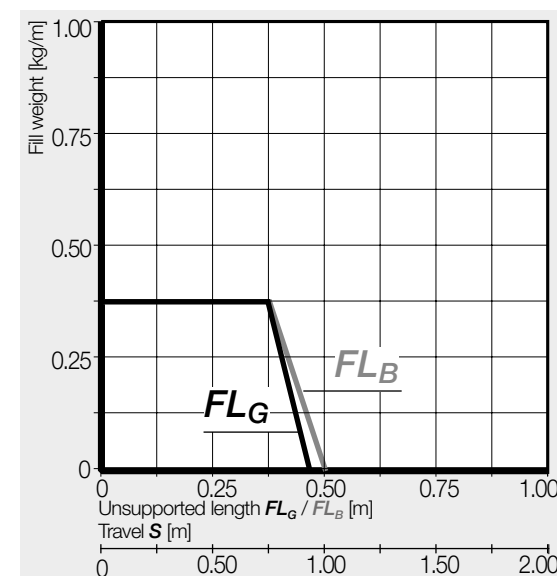


Inner height [mm]	7
Pitch [mm/link]	16.7
Links/m	60
corresponds to [mm]	1,002
e-chain® length	$L_K = S/2 + K$

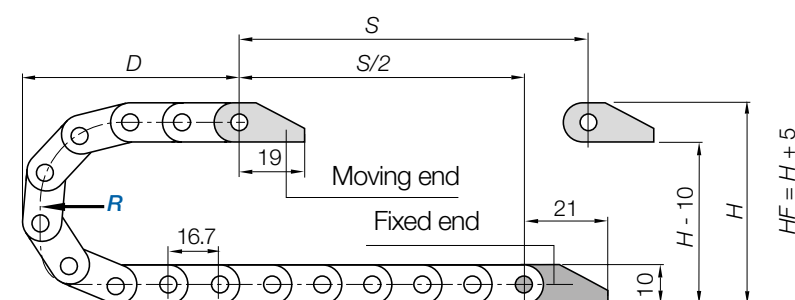

R	015	018	028	038	048
H	40	46	66	86	106
D	45	48	58	68	78
K	85	90	125	155	185


The required clearance height: $H_F = H + 5\text{mm}$ (with 0.1kg/m fill weight)

282 More information ► www.igus.eu/04

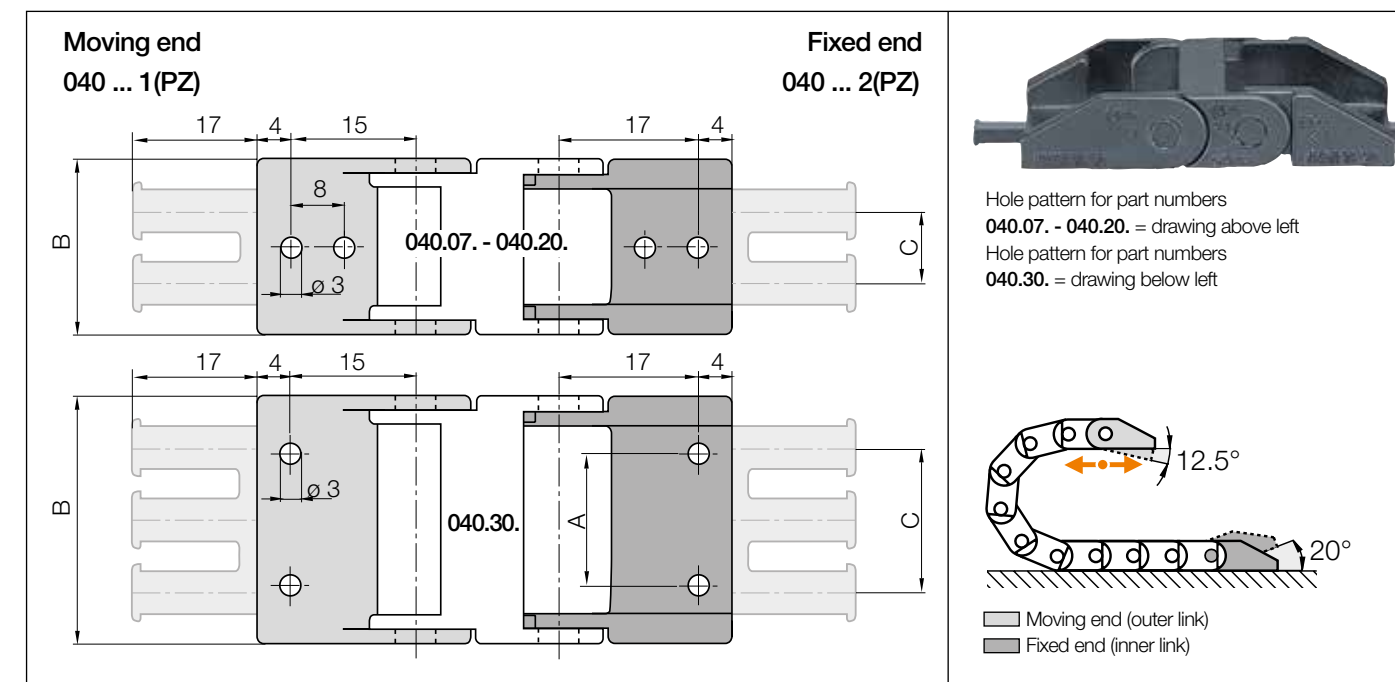

Width index	Part No. full set with tiewrap plates	Part No. full set without tiewrap plates	A [mm]	B [mm]	C [mm]	Number of teeth
07. ►	040.07.12PZ	040.07.12	—	12	—	1
10. ►	040.10.12PZ	040.10.12	—	15	—	1
16. ►	040.16.12PZ	040.16.12	—	21	10	2
20. ►	040.20.12PZ	040.20.12	—	25	10	2
30. ►	040.30.12PZ	040.30.12	22	35	20	3

Material mounting bracket - igumid G, temperature: -40° up to +120°C, VDE 0304 IIC UL94-HB

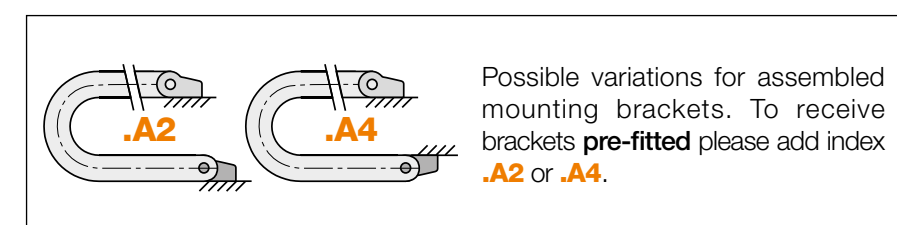

040.07.12PZ.A2 Order example
 .A... to indicate option with brackets pre-fitted
 With integrated strain relief tiewrap plates
 Full set
 Series

igus 3D CAD, service life calculation, configurators and more ► www.igus.eu/E2micro

283