

### Technical information

Nominal bore [mm]	Cv value		Q [L/min] water 20 °C, Δp = 1 bar / 15 psi		Q [m³/h] air 6 bar abs / 87 psia, 20 °C, Δp = 1 bar / 15 psi		p max. permissible static [bar / psi]
	EA	BA	EA	BA	EA	BA	
							Stainless steel
							coupled
3		0.45		6.43		22.77	64 / 928
5		0.80		11.42		40.49	64 / 928
7		1.85		26.42		93.62	64 / 928
9		2.75		39.27		139.17	64 / 928
12		4.50		64.26		227.73	64 / 928
19		9.80		139.95		495.95	40 / 580

One side self-sealing (EA). Both sides self-sealing (BA). The pressure values are applicable at a temperature of 20°C. Please inquire about other temperature ranges.


The maximum permissible operating pressures specified here (p max. permissible static) for the quick coupling systems apply exclusively to the materials stated by us and operation with Group II media according to Directive 2014/68/EU. The use of optional materials, other media (especially media from Group I) or other temperature ranges can lead to deviating maximum permissible operating pressures and must be requested separately at your supplier or directly at WALTHER-PRÄZISION.

Please note that both the maximum permissible operating pressure of the quick coupling system and the maximum permissible operating pressure of the connection must be considered in determining the plant operating pressure. Our safety instructions must be followed. You can find the safety instructions on page 22 of this catalogue.

If you have additional questions or need further information, please consult either your supplier or WALTHER-PRÄZISION directly

◀◀ To view the performance diagram please click here.

To view the connection description ▶▶▶ please click here.

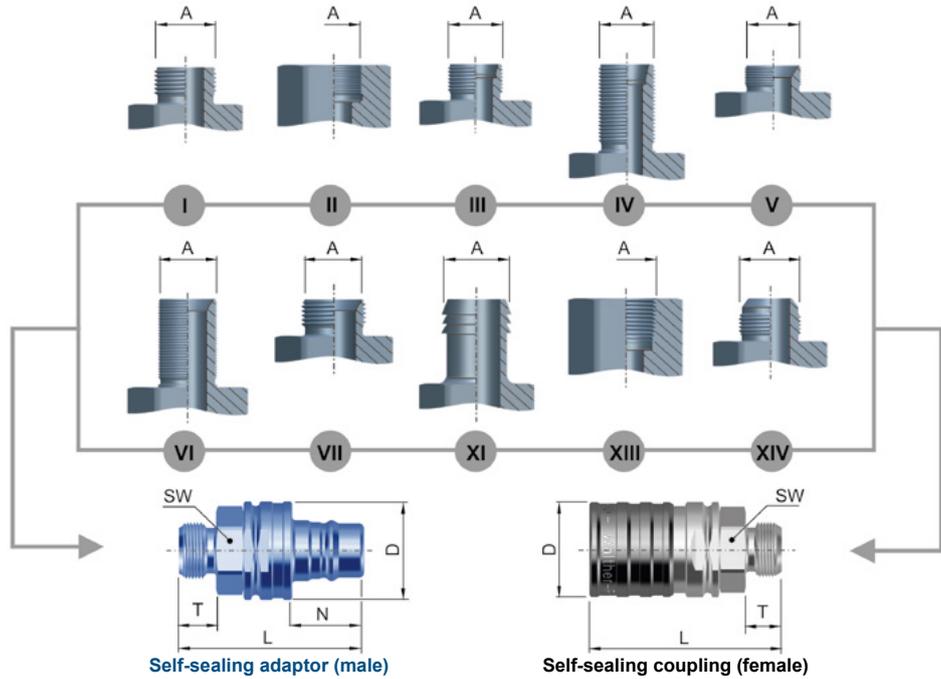

## Product design features

**Intended use:** Low pressure clean break quick coupling system with automatic locking, for the transmission of fluid or gaseous media in an industrial / commercial environment, especially for the chemical industry.

Properties	Materials	Seals	Additional options
<ul style="list-style-type: none"> <li>- Automatic locking (One-hand operation)</li> <li>- Low leakage volume during disconnection</li> <li>- Minimal air inclusion when connecting</li> <li>- Non-Squirting</li> <li>- Can be coupled under residual pressure</li> </ul> <p>Also available as emergency release or breakaway coupling.</p>	02 = Stainless steel 1.4307	2 = FKM 4 = EPDM  <b>Optional</b> FFKM	BB = 3.1 production EF = 1935/2004-compliant EX = ATEX-compliant FD = FDA-compliant FF = Oil- and grease-free FL = free from paint wetting impairment substances RG* = Ring grips TA = in line with TA-Luft  Non-interchangeable encoding on request

\*Only available from NB 19

There are special parking stations for Series CT self-sealing couplings and self-sealing adaptors. Suitable protection elements can be found in this catalogue from p. 180.

**Note:** Information to residual leakage volumens or ingress volume when connecting on request

### Order number configuration

**CT-003-0-SL004-Material-Seal-Additional options-Y./-Z..**

## Product chart



NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
3	Self-sealing coupling (female)	4 mm	XI			3	14	18	21.4	72.9		97	CT-003-0-SL004-...-
3	Self-sealing coupling (female)	6 mm	XI				14	25	21.4	78.7		98	CT-003-0-SL006-...-
3	Self-sealing coupling (female)	BSPP 1/8"	I				14	8	21.4	61.7		98	CT-003-0-WR010-...-
3	Self-sealing coupling (female)	BSPP 1/4"	I				14	11	21.4	64.7		104	CT-003-0-WR013-...-
3	Self-sealing coupling (female)	BSPP 1/8"	II				14	9	21.4	63.7		104	CT-003-0-WR510-...-

**NB** - Nominal bore [mm] **A** - Connection **SW** - Wrench size [mm] **T** - Thread length [mm] **D** - Diameter [mm] **L** - Length [mm] **N** - Adaptor length [mm] **Weight** [g]

## Product chart

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
3	Self-sealing adaptor (male)	4 mm	XI			3	14	18	21.4	58.7	22.2	42	CT-003-2-SL004-...-
3	Self-sealing adaptor (male)	6 mm	XI				14	25	21.4	64.5	22.2	43	CT-003-2-SL006-...-
3	Self-sealing adaptor (male)	BSPP 1/8"	I				14	8	21.4	47.5	22.2	43	CT-003-2-WR010-...-
3	Self-sealing adaptor (male)	BSPP 1/4"	I				14	11	21.4	50.5	22.2	49	CT-003-2-WR013-...-
3	Self-sealing adaptor (male)	BSPP 1/8"	II				14	9	21.4	49.5	22.2	49	CT-003-2-WR510-...-
5	Self-sealing coupling (female)	M 14 x 1.5	V			6	19	10	26.2	67.5		160	CT-005-0-D0614-...-
5	Self-sealing coupling (female)	M 14 x 1.5	VI			6	19	32	26.2	89.5		180	CT-005-0-DV008-...-
5	Self-sealing coupling (female)	M 12 x 1.5	III	L	6	4	19	10	26.2	67.5		160	CT-005-0-L0612-...-
5	Self-sealing coupling (female)	M 14 x 1.5	III	L	8	6	19	10	26.2	67.5		160	CT-005-0-L0814-...-
5	Self-sealing coupling (female)	M 16 x 1.5	III	L	10	8	19	11	26.2	68.5		160	CT-005-0-L1016-...-
5	Self-sealing coupling (female)	M 18 x 1.5	III	L	12	10	19	11	26.2	68.5		160	CT-005-0-L1218-...-
5	Self-sealing coupling (female)	9/16 - 18UNF-3 -JIC	XIV				19	14.1	26.2	71.5		170	CT-005-0-LH014-...-
5	Self-sealing coupling (female)	M 14 x 1.5	IV	L	8	6	19	32	26.2	89.5		180	CT-005-0-LV008-...-
5	Self-sealing coupling (female)	NPT 1/4"	XIII				19	17	26.2	72.5		180	CT-005-0-NP513-...-
5	Self-sealing coupling (female)	NPT 3/8"	XIII				19	18	26.2	72.5		180	CT-005-0-NP517-...-
5	Self-sealing coupling (female)	M 18 x 1.5	III	S	10	6	19	12	26.2	68.5		170	CT-005-0-S1018-...-
5	Self-sealing coupling (female)	M 20 x 1.5	III	S	12	8	22	12	26.2	69.5		180	CT-005-0-S1220-...-
5	Self-sealing coupling (female)	6 mm	XI			4	19	25	26.2	82.5		160	CT-005-0-SL006-...-
5	Self-sealing coupling (female)	9 mm	XI				19	30	26.2	87.5		160	CT-005-0-SL009-...-

NB - Nominal bore [mm] A - Connection SW - Wrench size [mm] T - Thread length [mm] D - Diameter [mm] L - Length [mm] N - Adaptor length [mm] Weight [g]

**Product chart**

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
5	Self-sealing coupling (female)	11 mm	XI				19	30	26.2	87.5		170	CT-005-0-SL011-...
5	Self-sealing coupling (female)	13 mm	XI				19	30	26.2	87.5		180	CT-005-0-SL013-...
5	Self-sealing coupling (female)	BSPP 1/4"	VII			6	19	11	26.2	68.5		160	CT-005-0-VR013-...
5	Self-sealing coupling (female)	BSPP 3/8"	VII			6	19	12	26.2	69.5		170	CT-005-0-VR017-...
5	Self-sealing coupling (female)	BSPP 1/4"	I				19	11	26.2	68.5		160	CT-005-0-WR013-...
5	Self-sealing coupling (female)	BSPP 3/8"	I				19	12	26.2	69.5		170	CT-005-0-WR017-...
5	Self-sealing coupling (female)	BSPP 1/2"	I				22	15	26.2	72.5		190	CT-005-0-WR021-...
5	Self-sealing coupling (female)	BSPP 1/4"	II				19	13	26.2	67.5		170	CT-005-0-WR513-...
5	Self-sealing coupling (female)	BSPP 3/8"	II				22	14	26.2	68.5		170	CT-005-0-WR517-...
5	Self-sealing coupling (female)	M 16 x 1.5	IV	L	10	8	19	32	26.2	89.5		190	CT-005-0-XX211-...
5	Self-sealing adaptor (male)	M 14 x 1.5	V			6	19	10	26	53	22	72	CT-005-2-D0614-...
5	Self-sealing adaptor (male)	M 14 x 1.5	VI			6	19	32	26	75	22	87	CT-005-2-DV008-...
5	Self-sealing adaptor (male)	M 12 x 1.5	III	L	6	4	19	10	26	53	22	67	CT-005-2-L0612-...
5	Self-sealing adaptor (male)	M 14 x 1.5	III	L	8	6	19	10	26	53	22	72	CT-005-2-L0814-...
5	Self-sealing adaptor (male)	M 16 x 1.5	III	L	10	8	19	11	26	54	22	72	CT-005-2-L1016-...
5	Self-sealing adaptor (male)	M 18 x 1.5	III	L	12	10	19	11	26	54	22	72	CT-005-2-L1218-...
5	Self-sealing adaptor (male)	9/16 - 18UNF-3 -JIC	XIV				19	14.1	26	57	22	70	CT-005-2-LH014-...
5	Self-sealing adaptor (male)	M 14 x 1.5	IV	L	8	6	19	32	26	75	22	87	CT-005-2-LV008-...
5	Self-sealing adaptor (male)	NPT 1/4"	XIII				19	17	26	58	22	85	CT-005-2-NP513-...
5	Self-sealing adaptor (male)	NPT 3/8"	XIII				19	18	26	58	22	80	CT-005-2-NP517-...

NB - Nominal bore [mm] A - Connection SW - Wrench size [mm] T - Thread length [mm] D - Diameter [mm] L - Length [mm] N - Adaptor length [mm] Weight [g]

## Product chart

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
5	Self-sealing adaptor (male)	M 18 x 1.5	III	S	10	6	19	12	26	55	22	77	CT-005-2-S1018-...-
5	Self-sealing adaptor (male)	M 20 x 1.5	III	S	12	8	22	12	26	55	22	87	CT-005-2-S1220-...-
5	Self-sealing adaptor (male)	6 mm	XI			4	19	25	26	68	22	67	CT-005-2-SL006-...-
5	Self-sealing adaptor (male)	9 mm	XI				19	30	26	73	22	72	CT-005-2-SL009-...-
5	Self-sealing adaptor (male)	11 mm	XI				19	30	26	73	22	77	CT-005-2-SL011-...-
5	Self-sealing adaptor (male)	13 mm	XI				19	30	26	58	22	87	CT-005-2-SL013-...-
5	Self-sealing adaptor (male)	BSPP 1/4 "	VII			6	19	11	26	54	22	72	CT-005-2-VR013-...-
5	Self-sealing adaptor (male)	BSPP 3/8 "	VII			6	19	12	26	55	22	77	CT-005-2-VR017-...-
5	Self-sealing adaptor (male)	BSPP 1/4 "	I				19	11	26	54	22	72	CT-005-2-WR013-...-
5	Self-sealing adaptor (male)	BSPP 3/8 "	I				19	12	26	55	22	77	CT-005-2-WR017-...-
5	Self-sealing adaptor (male)	BSPP 1/2"	I				22	15	26	58	22	97	CT-005-2-WR021-...-
5	Self-sealing adaptor (male)	BSPP 1/4"	II				19	13	26	53	22	85	CT-005-2-WR513-...-
5	Self-sealing adaptor (male)	BSPP 3/8"	II				22	14	26	54	22	82	CT-005-2-WR517-...-
5	Self-sealing adaptor (male)	M 16 x 1.5	IV	L	10	8	19	32	26	75	22	97	CT-005-2-XX211-...-
7	Self-sealing coupling (female)	M 16 x 1.5	V			8	24	11	32.7	77		260	CT-007-0-D0816-...-
7	Self-sealing coupling (female)	M 16 x 1.5	III			7	24	33.5	32.7	99.5		270	CT-007-0-DV010-...-
7	Self-sealing coupling (female)	M 16 x 1.5	III	L	10	8	24	11	32.7	77		250	CT-007-0-L1016-...-
7	Self-sealing coupling (female)	M 18 x 1.5	III	L	12	10	24	11	32.7	77		250	CT-007-0-L1218-...-
7	Self-sealing coupling (female)	9/16 - 18UNF-3 -JIC	XIV			6.3	24	14.1	32.7	80.1		250	CT-007-0-LH014-...-
7	Self-sealing coupling (female)	NPT 3/8"	XIII				24	18	32.7	82		280	CT-007-0-NP517-...-

NB - Nominal bore [mm] A - Connection SW - Wrench size [mm] T - Thread length [mm] D - Diameter [mm] L - Length [mm] N - Adaptor length [mm] Weight [g]

**Product chart**

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
7	Self-sealing coupling (female)	M 20 x 1.5	III	S	12	8	24	12	32.7	78		260	CT-007-0-S1220-...
7	Self-sealing coupling (female)	9 mm	XI			6	24	30	32.7	96		260	CT-007-0-SL009-...
7	Self-sealing coupling (female)	11 mm	XI				24	30	32.7	96		260	CT-007-0-SL011-...
7	Self-sealing coupling (female)	13 mm	XI				24	30	32.7	96		270	CT-007-0-SL013-...
7	Self-sealing coupling (female)	BSPP 3/8"	VII			7	24	12	32.7	78		250	CT-007-0-VR017-...
7	Self-sealing coupling (female)	BSPP 3/8"	I				24	12	32.7	78		260	CT-007-0-WR017-...
7	Self-sealing coupling (female)	BSPP 1/2"	I				24	15	32.7	81		270	CT-007-0-WR021-...
7	Self-sealing coupling (female)	BSPP 3/8"	II				24	14	32.7	78		270	CT-007-0-WR517-...
7	Self-sealing coupling (female)	BSPP 1/2"	II				27	17	32.7	81		290	CT-007-0-WR521-...
7	Self-sealing adaptor (male)	M 14 x 1.5	V			6	19	10	26	52	27	73	CT-007-2-D0614-...
7	Self-sealing adaptor (male)	M 14 x 1.5	VI			6	19	32	26	74	27	93	CT-007-2-DV008-...
7	Self-sealing adaptor (male)	M 12 x 1.5	III	L	6	4	19	10	26	52	27	73	CT-007-2-L0612-...
7	Self-sealing adaptor (male)	M 14 x 1.5	III	L	8	6	19	10	26	52	27	73	CT-007-2-L0814-...
7	Self-sealing adaptor (male)	M 16 x 1.5	III	L	10	8	19	11	26	53	27	73	CT-007-2-L1016-...
7	Self-sealing adaptor (male)	M 18 x 1.5	III	L	12	10	19	11	26	53	27	73	CT-007-2-L1218-...
7	Self-sealing adaptor (male)	9/16 - 18UNF-3 -JIC	XIV			6,3	19	14.1	26	56	27	71	CT-007-2-LH014-...
7	Self-sealing adaptor (male)	M 14 x 1.5	IV	L	8	6	19	32	26	74	27	93	CT-007-2-LV008-...
7	Self-sealing adaptor (male)	NPT 3/8"	XIII				19	18	26	57	27	82	CT-007-2-NP517-...
7	Self-sealing adaptor (male)	M 18 x 1.5	III	S	10	6	19	12	26	54	27	83	CT-007-2-S1018-...
7	Self-sealing adaptor (male)	M 20 x 1.5	III	S	12	8	22	12	26	54	27	93	CT-007-2-S1220-...
7	Self-sealing adaptor (male)	9 mm	XI			6,5	19	30	26	72	27	73	CT-007-2-SL009-...

NB - Nominal bore [mm] A - Connection SW - Wrench size [mm] T - Thread length [mm] D - Diameter [mm] L - Length [mm] N - Adaptor length [mm] Weight [g]

**Product chart**

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
7	Self-sealing adaptor (male)	11 mm	XI				19	30	26	72	27	73	CT-007-2-SL011-...-
7	Self-sealing adaptor (male)	13 mm	XI				19	30	26	72	27	83	CT-007-2-SL013-...-
7	Self-sealing adaptor (male)	BSPP 1/4"	VII			6.5	19	11	26	53	27	73	CT-007-2-VR013-...-
7	Self-sealing adaptor (male)	BSPP 3/8"	VII			7	19	12	26	54	27	78	CT-007-2-VR017-...-
7	Self-sealing adaptor (male)	BSPP 1/4"	I				19	11	26	53	27	73	CT-007-2-WR013-...-
7	Self-sealing adaptor (male)	BSPP 3/8"	I				19	12	26	54	27	78	CT-007-2-WR017-...-
7	Self-sealing adaptor (male)	BSPP 1/2"	I				22	15	26	57	27	88	CT-007-2-WR021-...-
7	Self-sealing adaptor (male)	BSPP 1/4"	II				19	13	26	52	27	83	CT-007-2-WR513-...-
7	Self-sealing adaptor (male)	BSPP 3/8"	II				22	14	26	53	27	83	CT-007-2-WR517-...-
7	Self-sealing adaptor (male)	M 16 x 1.5	IV	L	10	8	19	32	26	74	27	103	CT-007-2-XX211-...-
9	Self-sealing coupling (female)	13 mm	XI				25	30	35.4	101		273	CT-009-0-SL013-...-
9	Self-sealing coupling (female)	BSPP 3/8"	I				25	12	35.4	83		333	CT-009-0-WR017-...-
9	Self-sealing coupling (female)	BSPP 1/2"	I				25	15	35.4	86		343	CT-009-0-WR021-...-
9	Self-sealing coupling (female)	BSPP 1/2"	II				27	17	35.4	86		283	CT-009-0-WR521-...-
9	Self-sealing adaptor (male)	9/16 - 18UNF-3 -JIC	XIV			6.3	25	14.1	28	70.1	30	120	CT-009-2-LH014-...-
9	Self-sealing adaptor (male)	NPT 1/2"	XIII				27	22	30	73	30	190	CT-009-2-NP521-...-
9	Self-sealing adaptor (male)	13 mm	XI				25	30	28	86	30	170	CT-009-2-SL013-...-
9	Self-sealing adaptor (male)	BSPP 3/8"	I				25	12	28	68	30	130	CT-009-2-WR017-...-
9	Self-sealing adaptor (male)	BSPP 1/2"	I				25	15	28	71	30	140	CT-009-2-WR021-...-
9	Self-sealing adaptor (male)	BSPP 1/2"	II				27	17	30	71	30	180	CT-009-2-WR521-...-

NB - Nominal bore [mm] A - Connection SW - Wrench size [mm] T - Thread length [mm] D - Diameter [mm] L - Length [mm] N - Adaptor length [mm] Weight [g]

**Product chart**

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
12	Self-sealing coupling (female)	M 22 x 1.5	V			12	32	17	40	77		380	CT-012-0-D1222-...-
12	Self-sealing coupling (female)	M 22 x 1.5	VI			12	32	39	40	104		430	CT-012-0-DV015-...-
12	Self-sealing coupling (female)	M 18 x 1.5	III	L	12	10	32	11	40	76		370	CT-012-0-L1218-...-
12	Self-sealing coupling (female)	M 22 x 1.5	III	L	15	12	32	12	40	77		380	CT-012-0-L1522-...-
12	Self-sealing coupling (female)	7/8 - 14UNF- 3 -JIC	XIV				32	19.3	40	84		400	CT-012-0-LH022-...-
12	Self-sealing coupling (female)	NPT 1/2"	XIII				32	22	40	84		480	CT-012-0-NP521-...-
12	Self-sealing coupling (female)	M 24 x 1.5	III	S	16	12	32	14	40	79		390	CT-012-0-S1624-...-
12	Self-sealing coupling (female)	16 mm	XI				32	35	40	100		390	CT-012-0-SL016-...-
12	Self-sealing coupling (female)	19 mm	XI				32	35	40	100		410	CT-012-0-SL019-...-
12	Self-sealing coupling (female)	BSPP 1/2"	VII			12	32	15	40	80		380	CT-012-0-VR021-...-
12	Self-sealing coupling (female)	BSPP 3/4"	VII			12	32	17	40	82		400	CT-012-0-VR026-...-
12	Self-sealing coupling (female)	BSPP 1/2"	I			12	32	15	40	80		380	CT-012-0-WR021-...-
12	Self-sealing coupling (female)	BSPP 3/4"	I				32	17	40	82		410	CT-012-0-WR026-...-
12	Self-sealing coupling (female)	BSPP 1"	I				32	20	40	86		470	CT-012-0-WR033-...-
12	Self-sealing coupling (female)	BSPP 1/2"	II				32	17	40	79		420	CT-012-0-WR521-...-
12	Self-sealing coupling (female)	BSPP 3/4"	II				32	19	40	81		400	CT-012-0-WR526-...-
12	Self-sealing adaptor (male)	M 22 x 1.5	V			12	32	17	40	73	30	260	CT-012-2-D1222-...-
12	Self-sealing adaptor (male)	M 22 x1.5	VI			12	32	39	40	100	30	260	CT-012-2-DV015-...-
12	Self-sealing adaptor (male)	M 18 x 1.5	III	L	12	10	32	11	40	72	30	250	CT-012-2-L1218-...-
12	Self-sealing adaptor (male)	M 22 x 1.5	III	L	15	12	32	12	40	73	30	260	CT-012-2-L1522-...-
12	Self-sealing adaptor (male)	7/8 - 14UNF- 3 -JIC	XIV				32	19.3	40	83	30	280	CT-012-2-LH022-...-

**NB** - Nominal bore [mm] **A** - Connection **SW** - Wrench size [mm] **T** - Thread length [mm] **D** - Diameter [mm] **L** - Length [mm] **N** - Adaptor length [mm] **Weight** [g]

**Product chart**

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
12	Self-sealing adaptor (male)	NPT 1/2"	XIII				32	22	40	83	30	360	CT-012-2-NP521-...-
12	Self-sealing adaptor (male)	M 24 x 1.5	III	S	16	12	32	14	40	75	30	270	CT-012-2-S1624-...-
12	Self-sealing adaptor (male)	16 mm	XI				32	35	40	96	30	270	CT-012-2-SL016-...-
12	Self-sealing adaptor (male)	19 mm	XI				32	35	40	96	30	290	CT-012-2-SL019-...-
12	Self-sealing adaptor (male)	BSPP 1/2"	VII				32	15	40	76	30	260	CT-012-2-VR021-...-
12	Self-sealing adaptor (male)	BSPP 3/4"	VII				32	17	40	87	30	280	CT-012-2-VR026-...-
12	Self-sealing adaptor (male)	BSPP 1/2"	I				32	15	40	76	30	260	CT-012-2-WR021-...-
12	Self-sealing adaptor (male)	BSPP 3/4"	I				32	17	40	78	30	290	CT-012-2-WR026-...-
12	Self-sealing adaptor (male)	BSPP 1"	I				32	20	40	82	30	350	CT-012-2-WR033-...-
12	Self-sealing adaptor (male)	BSPP 1/2"	II				32	17	40	78	30	300	CT-012-2-WR521-...-
12	Self-sealing adaptor (male)	BSPP 3/4"	II				32	19	40	80	30	280	CT-012-2-WR526-...-
19	Self-sealing coupling (female)	M 30 x 1.5	VI			19	46	45	58	156		1,470	CT-019-0-DV022-...-
19	Self-sealing coupling (female)	M 30 x 2	III	L	22	20	46	14	58	125		1,380	CT-019-0-L2230-...-
19	Self-sealing coupling (female)	1 1/16 - 12UN-3 -JIC	XIV			15.5	46	22	58	133		1,360	CT-019-0-LH027-...-
19	Self-sealing coupling (female)	NPT 3/4"	XIII				46	23.5	58	127		1,460	CT-019-0-NP526-...-
19	Self-sealing coupling (female)	M 36 x 2	III	S	25	20	46	18	58	129		1,410	CT-019-0-S2536-...-
19	Self-sealing coupling (female)	19 mm	XI			13	46	35	58	146		1,400	CT-019-0-SL019-...-
19	Self-sealing coupling (female)	25 mm	XI				46	40	58	151		1,420	CT-019-0-SL025-...-
19	Self-sealing coupling (female)	28 mm	XI				46	45	58	156		1,470	CT-019-0-SL028-...-
19	Self-sealing coupling (female)	BSPP 3/4"	VII			17	46	17	58	128		1,380	CT-019-0-VR026-...-

NB - Nominal bore [mm] A - Connection SW - Wrench size [mm] T - Thread length [mm] D - Diameter [mm] L - Length [mm] N - Adaptor length [mm] Weight [g]

**Product chart**

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Stainless steel	Material-neutral part number
19	Self-sealing coupling (female)	BSPP 1"	VII			19	46	20	58	131		1,420	CT-019-0-VR033-...-
19	Self-sealing coupling (female)	BSPP 3/4"	I			17	46	17	58	128		1,390	CT-019-0-WR026-...-
19	Self-sealing coupling (female)	BSPP 1"	I				46	20	58	131		1,420	CT-019-0-WR033-...-
19	Self-sealing coupling (female)	BSPP 3/4"	II				46	19	52	122		1,440	CT-019-0-WR526-...-
19	Self-sealing coupling (female)	BSPP 1"	II				46	23	52	126		1,430	CT-019-0-WR533-...-
19	Self-sealing adaptor (male)	M 30 x 1.5	VI			19	46	45	52	127	43.6	650	CT-019-2-DV022-...-
19	Self-sealing adaptor (male)	M 30 x 2	III	L	22	20	46	14	52	96	43.6	550	CT-019-2-L2230-...-
19	Self-sealing adaptor (male)	1 1/16 - 12UN-3 -JIC	XIV			15.5	46	22	52	104	43.6	650	CT-019-2-LH027-...-
19	Self-sealing adaptor (male)	NPT 3/4"	XIII				46	23.5	52	98	43.6	640	CT-019-2-NP526-...-
19	Self-sealing adaptor (male)	M 36 x 2	III	S	25	20	46	18	52	100	43.6	590	CT-019-2-S2536-...-
19	Self-sealing adaptor (male)	19 mm	XI			13	46	35	52	117	43.6	580	CT-019-2-SL019-...-
19	Self-sealing adaptor (male)	25 mm	XI				46	40	52	122	43.6	590	CT-019-2-SL025-...-
19	Self-sealing adaptor (male)	28 mm	XI				46	45	52	127	43.6	660	CT-019-2-SL028-...-
19	Self-sealing adaptor (male)	BSPP 3/4"	VII			17	46	17	52	99	43.6	570	CT-019-2-VR026-...-
19	Self-sealing adaptor (male)	BSPP 1"	VII			19	46	20	52	102	43.6	600	CT-019-2-VR033-...-
19	Self-sealing adaptor (male)	BSPP 3/4"	I			17	46	17	52	99	43.6	570	CT-019-2-WR026-...-
19	Self-sealing adaptor (male)	BSPP 1"	I				46	20	52	102	43.6	600	CT-019-2-WR033-...-
19	Self-sealing adaptor (male)	BSPP 3/4"	II				46	19	52	93	43.6	620	CT-019-2-WR526-...-
19	Self-sealing adaptor (male)	BSPP 1"	II				46	23	52	97	43.6	610	CT-019-2-WR533-...-

NB - Nominal bore [mm] A - Connection SW - Wrench size [mm] T - Thread length [mm] D - Diameter [mm] L - Length [mm] N - Adaptor length [mm] Weight [g]