

Series HC

Technical information

Nominal bore [mm]	Cv value		Q [L/min] water 20 °C, Δp = 1 bar / 15 psi		Q [m³/h] air 6 bar abs / 87 psia, 20 °C, Δp = 1 bar / 15 psi		p max. permissible static [bar / psi]
	EA	BA	EA	BA	EA	BA	
6		0.61		8.71		30.87	650 / 9,430
8		1.47		20.99		74.39	600 / 8,700
12		2.93		41.85		148.28	600 / 8,700
16		5.03		71.84		254.55	600 / 8,700
20		7.37		105.26		372.97	600 / 8,700

One side self-sealing (EA). Both sides self-sealing (BA). The pressure values are applicable at a temperature of 20°C. Please inquire about other temperature ranges.


The maximum permissible operating pressures specified here (p max. permissible static) for the quick coupling systems apply exclusively to the materials stated by us and operation with Group II media according to Directive 2014/68/EU. The use of optional materials, other media (especially media from Group I) or other temperature ranges can lead to deviating maximum permissible operating pressures and must be requested separately at your supplier or directly at WALTHER-PRÄZISION.

Please note that both the maximum permissible operating pressure of the quick coupling system and the maximum permissible operating pressure of the connection must be considered in determining the plant operating pressure. Our safety instructions must be followed. You can find the safety instructions on page 22 of this catalogue.

If you have additional questions or need further information, please consult either your supplier or WALTHER-PRÄZISION directly.

◀◀◀ To view the performance diagram please click here.

To view the connection description ▶▶▶ please click here.

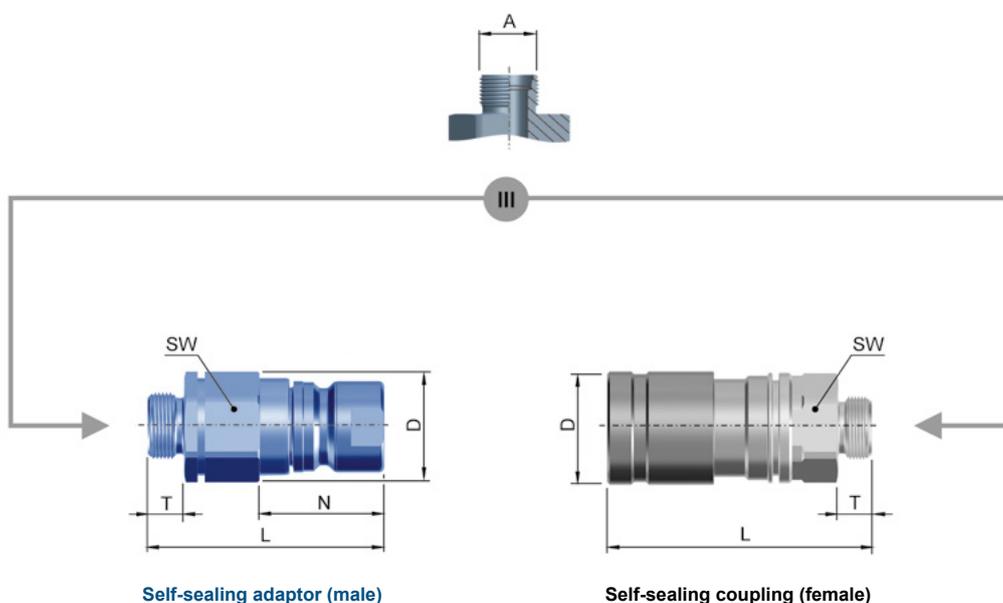

Series HC


Product design features

Intended use: Robust high pressure clean break quick coupling system in flat-face design for the transmission of fluid media in an industrial / commercial environment.

Properties	WEDISO	Additional options
<ul style="list-style-type: none"> - Low leakage volume during disconnection - Automatic locking (One-hand operation) - Non-Squirting - Minimal air inclusion when connecting - Full operating pressure even while disconnected - Flat surfaces for easy cleaning 	<p>Material Zinc-plated steel, yellow chromated steel, stainless steel Locking sleeve: phosphated black = WEDISO → all self-sealing couplings AABA, all self-sealing adaptors AABB</p> <p>Special seals suitable for pressurized liquids on mineral oil basis, HFA- and HFB-liquids</p> <p>Optional Complete stainless-steel version (p max. permissible, static: 325 bar)</p>	<p>Z10 = Base version Z11 = Pressure relief valve</p> <p>Additional options for harsh environments: Z12 = Additional dirt protection Z13 = Z11 + Z12 Z15 = Z13 + additional dirt sleeve</p>

Order number configuration
HC-G06-0-S1018-WEDISO-Additional options-Y../-Z..

Product chart

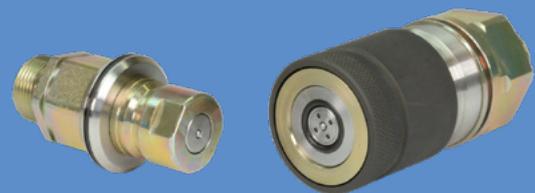

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Steel	Material-neutral part number
6	Self-sealing coupling (female)	M 18 x 1.5	III	S	10	6	27	12	34	98.8		455	HC-G06-0-S1018-....-Z10
6	Self-sealing adaptor (male)	M 18 x 1.5	III	S	10	6	27	12	30.1	69	23.4	177	HC-G06-2-S1018-....-Z10
8	Self-sealing coupling (female)	M 20 x 1.5	III	S	12	8	32	12	42.4	104.8		660	HC-G08-0-S1220-....-Z10
8	Self-sealing adaptor (male)	M 20 x 1.5	III	S	12	8	27	12	30.1	69.2	26.8	220	HC-G08-2-S1220-....-Z10

NB - Nominal bore [mm] **A** - Connection **SW** - Wrench size [mm] **T** - Thread length [mm] **D** - Diameter [mm] **L** - Length [mm] **N** - Adaptor length [mm] Weight [g]

Series HC

Product chart

NB	Product type	A	De- sign	Ran- ge	Pipe AD	Pipe ID	SW	T	D	L	N	Weight Steel	Material-neutral part number
12	Self-sealing coupling (female)	M 24 x 1.5	III	S	16	12	41	14	47.2	102.6		818	HC-G12-0-S1624-.....Z10
12	Self-sealing adaptor (male)	M 24 x 1.5	III	S	16	12	30	14	33.5	74.2	28.5	251	HC-G12-2-S1624-.....Z10
16	Self-sealing coupling (female)	M 30 x 2	III	S	20	16	50	16	57.8	112.4		1,406	HC-G16-0-S2030-.....Z10
16	Self-sealing adaptor (male)	M 30 x 2	III	S	20	16	41	16	45.6	80.4	31	487	HC-G16-2-S2030-.....Z10
20	Self-sealing coupling (female)	M 36 x 2	III	S	25	20	50	18	63.2	145.6		2,005	HC-G20-0-S2536-.....Z10
20	Self-sealing adaptor (male)	M 36 x 2	III	S	25	20	46	18	51.2	111.5	36	909	HC-G20-2-S2536-.....Z10

NB - Nominal bore [mm] A - Connection SW - Wrench size [mm] T - Thread length [mm] D - Diameter [mm] L - Length [mm] N - Adaptor length [mm] Weight [g]

