

Product Information

TF1

Temperature Controller TF1





- Installation location as desired
- Compact construction
- Normally opened or normally closed contact

Characteristics

A fully potted bimetal thermostat switches when a limit temperature is reached.


Technical data

Switch	bimetal thermostatic switch														
Process connection	male thread G 1/2 A - optionally G 3/4 A (further process connections available on request)														
Switching value	+40..+120 °C in 10 °C steps. The switching value is indicated for temperature increasing at 2 K/min.														
Tolerance	±10 K														
Hysteresis	10..20 K														
Pressure	PN 100														
Medium temperature	<table> <tr> <th>Switch</th><th>Medium temperature</th></tr> <tr> <td>40 °C</td><td>-20..+ 90 °C</td></tr> <tr> <td>50 °C</td><td>-20..+100 °C</td></tr> <tr> <td>60 °C</td><td>-20..+110 °C</td></tr> <tr> <td>70 °C</td><td>-20..+120 °C</td></tr> <tr> <td>80 °C</td><td>-20..+130 °C</td></tr> <tr> <td>from 90 °C</td><td>-20..+140 °C</td></tr> </table>	Switch	Medium temperature	40 °C	-20..+ 90 °C	50 °C	-20..+100 °C	60 °C	-20..+110 °C	70 °C	-20..+120 °C	80 °C	-20..+130 °C	from 90 °C	-20..+140 °C
Switch	Medium temperature														
40 °C	-20..+ 90 °C														
50 °C	-20..+100 °C														
60 °C	-20..+110 °C														
70 °C	-20..+120 °C														
80 °C	-20..+130 °C														
from 90 °C	-20..+140 °C														
Ambient temperature	-20..+70 °C														
Media	water, oils, gases														
Wiring	normally opened (n.o.) No. 0.212  normally closed (n.c.) No. 0.214 														
Switching voltage	max. 250 V AC														
Switching current	max. 10 A														
Protection class	1 - safety insulation														
Ingress protection	IP 65														


Electrical connection	plug DIN 43650-A / ISO 4400	
Materials medium-contact	Brass construction: CW614N	Stainless steel construction: 1.4305
Non-medium-contact materials	PA6.6, NBR	
Weight	G 1/2 A - 0.12 kg G 3/4 A - 0.18 kg	
Installation location	Installation location as desired. When installed, the sensor (Ø8) should be fully immersed in the medium.	

Dimensions

G 1/2 A

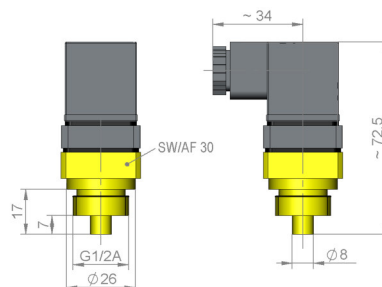

G 3/4 A (optional)

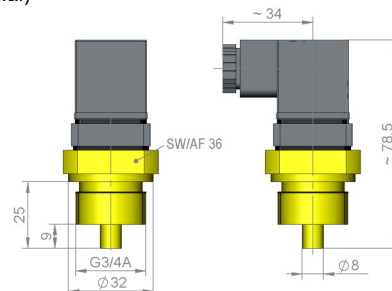

Ordering code

TF1 - 1. 2. 3. 4. 5.
TF1 -

○=Option

1. Switching range	040 .. 120	temperature 40..120 °C in 10 °C steps
2. Connection material	M	brass
	K	○ stainless steel
3. Connection	015	thread G 1/2 A
	020	○ thread G 3/4 A
4. Process connection	H	screw-in thread
5. Wiring	S	wiring 0.212 normally open (n.o.)
	O	wiring 0.214 normally closed (n.c.)

Options

- Signal lamp red