


Anlaufscheiben



Bestellschlüssel

XTM-0620-015

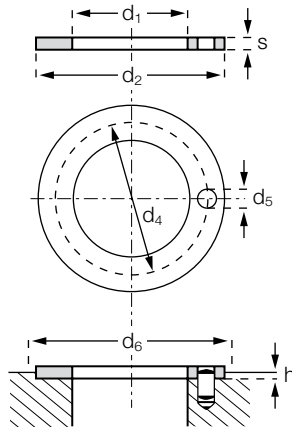

- Höhe s
- Außendurchmesser d2
- Innendurchmesser d1
- metrisch
- Anlaufscheibe (Form T)
- Werkstoff iglidur® X

Abmessungen nach ISO 3547-1 und Sonderabmessungen

Abmessungen [mm]

Bestellnummer	d1	d2	s	d4	d5	h	d6
	+0,25	-0,25	-0,05	-0,12 +0,12	+0,375 +0,125	+0,2 -0,2	+0,12
XTM-0620-015	6,0	20,0	1,5	13,0	1,5	1,0	20,0
XTM-0818-015	8,0	18,0	1,5	13,0	1,5	1,0	18,0
XTM-0829-015	8,0	29,0	1,5	**	**	1,0	
XTM-0830-015	8,0	30,0	1,5	**	**	1,0	
XTM-1018-010	10,0	18,0	1,0	**	**	0,7	18,0
XTM-1224-015	12,0	24,0	1,5	18,0	1,5	1,0	24,0
XTM-1426-015	14,0	26,0	1,5	20,0	2,0	1,0	26,0
XTM-1522-008	15,0	22,0	0,8	**	**	0,5	
XTM-1524-015	15,0	24,0	1,5	19,5	1,5	1,0	24,0
XTM-1630-015	16,0	30,0	1,5	22,0	2,0	1,0	30,0
XTM-1832-015	18,0	32,0	1,5	25,0	2,0	1,0	32,0
XTM-2036-015	20,0	36,0	1,5	28,0	3,0	1,0	36,0
XTM-2238-015	22,0	38,0	1,5	30,0	3,0	1,0	38,0
XTM-2442-015	24,0	42,0	1,5	33,0	3,0	1,0	42,0
XTM-2644-015	26,0	44,0	1,5	35,0	3,0	1,0	44,0
XTM-2848-015	28,0	48,0	1,5	38,0	4,0	1,0	48,0
XTM-3254-015	32,0	54,0	1,5	43,0	4,0	1,0	54,0
XTM-3862-015	38,0	62,0	1,5	50,0	4,0	1,0	62,0
XTM-4266-015	42,0	66,0	1,5	54,0	4,0	1,0	66,0
XTM-4874-020	48,0	74,0	2,0	61,0	4,0	1,5	74,0
XTM-5278-020	52,0	78,0	2,0	65,0	4,0	1,5	78,0
XTM-6290-020	62,0	90,0	2,0	76,0	4,0	1,5	90,0

** Ausführung ohne Fixierbohrung



Noch mehr Abmessungen ab Lager

Über 300 weitere Abmessungen stehen jetzt zur Verfügung. Sie können online nach Ihrem Wunschlager suchen.

► www.igus.de/iglidur-sonderabmessungen



Lieferzeit ab Lager



Preise Online-Preisliste

www.igus.de/de/x