




# Accessories

## Eyelet clamps/Retaining nuts



For Series	Ordering no.				Screw	Dimensions [mm]										Weight (Polyamic)
	Type	Material no.				BSPP	Pipe Ø	D Ø	B <sub>s</sub> * Ø	B <sup>**</sup> Ø	B <sub>1</sub>	B <sub>2</sub>	B <sub>3</sub>	H <sub>1</sub>	H <sub>2</sub>	
		51	53	5E												
226/2TR/216/302/308/350 468/ 548/ 679/684/652	090.053	○	○	○	Material 304 SS	3/8	3/8"	16,5-18,0	6,0	6,2-6,4	19,0	22,0	18,5	34,5	14,5	20 g
	090.003	○	○	○		3/8	1/2"	20-22,0	6,0	6,2-6,4	21,2	23,8	18,5	36,5	16,5	20 g
	090.013	○	○	○		3/8	3/4"	25-27,5	7,6	7,8-8,0	24,5	26,5	22,0	39,5	17,5	25 g
	090.023	○	○	○		3/8	1"	32-34,5	10,6	10,8-11,0	30,0	31,0	22,0	44,0	21,0	32 g
	090.033	○	○	○		3/8	1 1/4"	40-43,0	12,6	12,8-13,0	34,0	35,5	25,0	48,0	25,0	38 g

\*B<sub>s</sub> Ø = spigot diameter  
 \*\*B Ø = recommended bore diameter

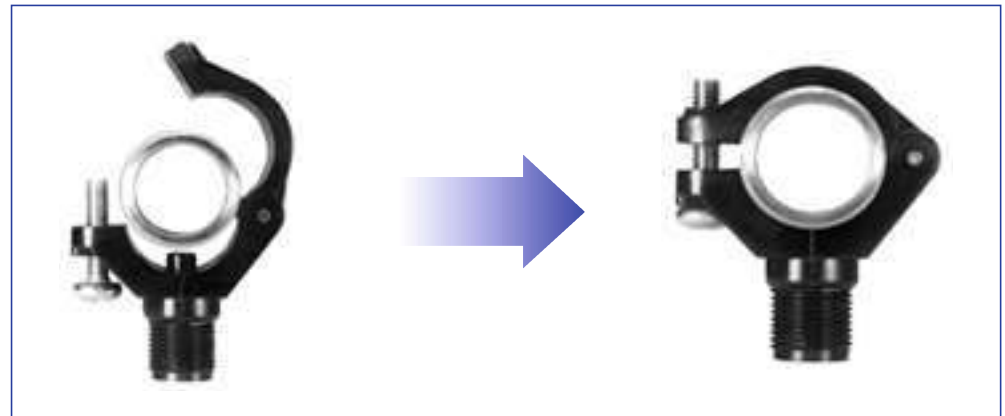

For Series	Ordering no.							Dimensions [mm]					Weight (Brass)
	Type	Material no.						BSPP	H <sub>1</sub>	H <sub>2</sub>	D Ø	Hex	
		16	17 <sup>1</sup>	1Y	30	56	5E						
226/2TR/468 548/652/660 679/684	065.200	○	○	-	○	-	-	3/8	13,0	10,0	12,8	22	25 g
	065.200	-	-	-	-	○	○	3/8	14,5	11,5	12,8	22	25 g
	069.000	○	-	○	○	-	-	UNF 11/16-16	14,3	8,7	13,1	21	25 g
656/657 664/665	065.600	○	○	-	○	-	○	3/4	16,0	13,0	20,1	32	60 g

<sup>1</sup> We reserve the right to deliver 316Ti SS or 316L SS under the material no. 17.

<b>Example</b>	<b>Type</b>	<b>+</b>	<b>Material no.</b>	<b>=</b>	<b>Ordering no.</b>
<b>for ordering:</b>	<b>090.053</b>	<b>+</b>	<b>51</b>	<b>=</b>	<b>090.053.51</b>

For filters and non-return valves please refer to page 9.9.